
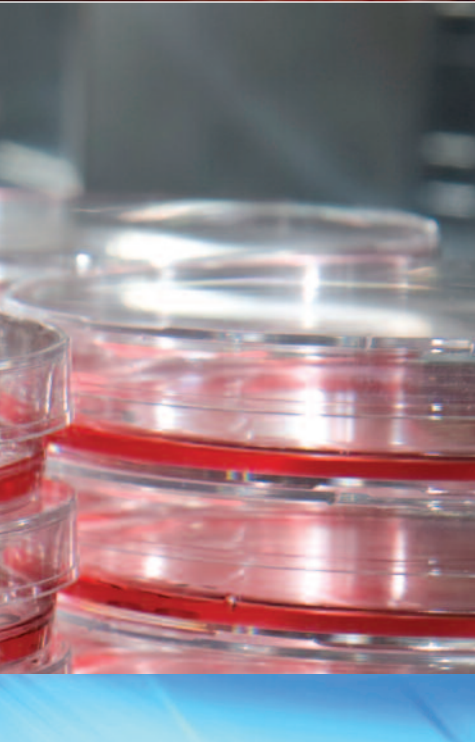


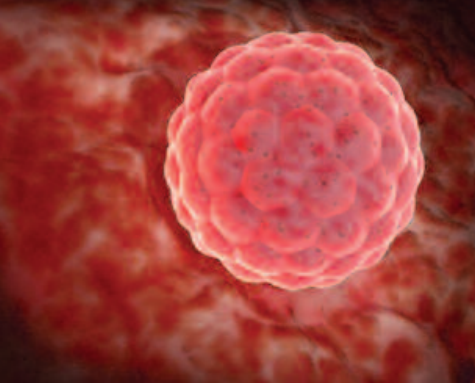

Thermo Scientific Midi 40 Small Capacity CO₂ Incubator

Conveniently sized for single user applications

supplyLAB

www.supplylab.pt
geral@supplylab.pt

Cacém Park - Edifício 9
Estrada de Paço de Arcos nº88
2739-512 Agualva Cacém
T +(351) 21 4278700
F +(351) 21 4278709

Midi 40™

Small Capacity CO₂ Incubator

Just the right size for your applications – and your bench top

The Thermo Scientific Midi 40 CO₂ incubator is designed specifically for cell culture scientists who require a compact culturing workspace to handle small workloads, perform personal use applications, or simply address limited space environments.

With its 1.4 cu ft (40 L) capacity, the Midi 40 adds a new dimension to the Thermo Scientific portfolio of leading CO₂ incubation solutions. It delivers the performance and capabilities of full-sized incubators in a space-saving footprint, ideal for those who wish to avoid shared-use environments that can present potential contamination risk through unnecessary sample handling and repeated door openings.



▶ Easy to operate and economical to own, the fully featured Midi 40 offers remarkable value in a small footprint.

The Midi 40 includes:

Advanced IntrlLogic™ II microprocessor: bright digital display and intuitive touchpad for simplified entry of temperature, CO₂ and alarm data, with keyed setpoint switch to prevent unauthorized changes to your operating parameters.

Stainless steel culture chamber: seamless, non-corrosive and exceptionally easy to clean. The Midi 40 is provided with four removable shelves.

Highly efficient direct heating design: provides even heat distribution to all sides of the chamber, for accurate control and uniformity.

Precise and reliable CO₂ control: featuring accurate thermal conductivity sensor located directly in the chamber, ensuring responsive control and long service life.

Removable water reservoir: generates relative humidity values up to 95% with rapid recovery rates that promote optimal cell growth.

Tempered inner glass door: provides sample security while preventing unwanted condensation.

Convenient data communication: RS-485 signal output is standard, in addition to audible and visual alarm functions to ensure proper operations.

supplyLAB
www.supplylab.pt

Designed to meet your requirements for a small, personal workspace

The Midi 40 can benefit your lab by:

► **Minimizing culture disturbance:**


As a single-user alternative, the Midi 40 eliminates the need for shared-use culturing and the impact on your samples from multiple user access and frequent door openings

► **Preventing cross contamination:**

The Midi 40 makes it cost-effective to dedicate incubator space to specific cell lines and individual research studies, when separation of samples and culture types is essential

► **Conserving bench top space:**

Small and economical, add culturing capacity to crowded labs or reduce operational costs with an incubator that is properly sized for your small throughput needs, capable of storing up to 35 T75 culture flasks

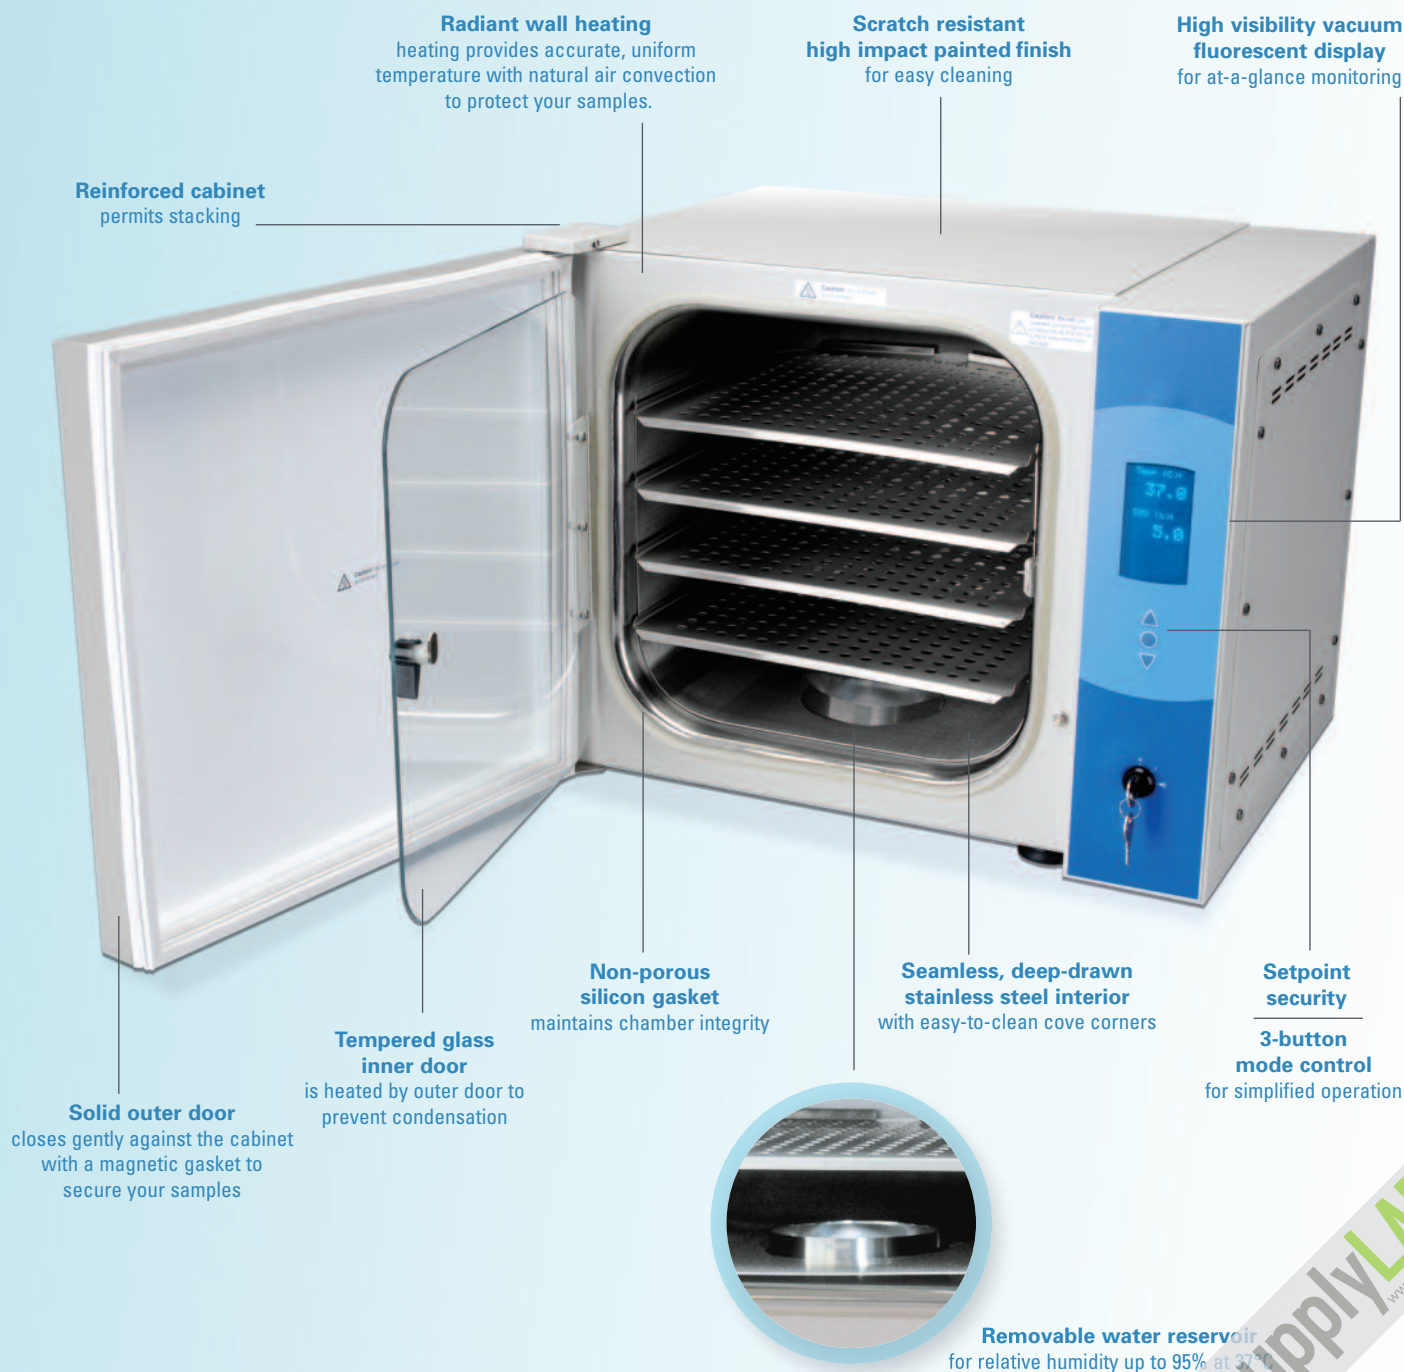

Thermo Scientific Midi 40 Small Capacity CO₂ Incubator



Technical Specifications		
Dimensions		
Exterior (w x h x d) inch/cm	23.5 x 18 x 18.5 (60 x 46.5 x 47)	
Interior (w x h x d) inch/cm	14 x 14 x 12 (35.5 x 35.5 x 30.5)	
Construction		
Cabinet configuration	bench top	
Interior	non-corrosive stainless steel, type 304, mirror finish	
Interior volume	1.4 cubic feet (39.6 L)	
Exterior	18 gauge, cold rolled steel, high impact painted finish	
Shelves		
Construction	stainless steel, perforated	
Shelf dimensions (w x d) inch/cm	13.5" x 11.5" (34.3 x 29.2)	
Surface area per shelf	1.08 sq. ft. (0.1 sq m)	
Temperature		
Range	5°C above ambient to 60°C	
Control accuracy	± 0.1°C	
Uniformity	± 0.4°C @ 37°C	
Alarm	user programmable high/low	
CO ₂		
Range	0-20%	
Control accuracy	± 0.1%	
Sensor	long life thermal conductivity sensor	
Uniformity	0.10%	
Inlet pressure required	15 PSIG (1.0 bar), 99.5 medical grade CO ₂	
Inlet air filtration	0.3 micron antimicrobial filter	
Alarm	user programmable high/low	
Humidity		
rH	to 95% @ 37°C	
Source	humidity pan, removable	
Electrical		
Rated voltage	120V, 60 Hz	230V, 50/60 Hz
Amps/breaker	1.5/15	1.0/15
Weight		
Net	60 lbs (27 kg)	
Shipping	70 lbs (32 kg)	
Warranty	1 year	

All specifications subject to change without notice.

Ordering Information		
Cat. No.	Description	
3403	Thermo Scientific Midi 40 Small Capacity CO ₂ Incubator, 120 V, 60 Hz	
3404	Thermo Scientific Midi 40 Small capacity CO ₂ Incubator, 230V, 50/60 Hz	



© 2010 Thermo Fisher Scientific Inc. All rights reserved. All trademarks are the property of Thermo Fisher Scientific Inc. and its subsidiaries. Specifications, terms and pricing are subject to change. Not all products are available in all countries.

North America: USA/Canada +1 866 984 3766 (866-9-THERMO)

www.thermoscientific.com/incubators

Europe: Austria +43 1 801 40 0, Belgium +32 53 73 42 41, France +33 2 2803 2180, Germany national toll free 08001-536 376, Germany international +49 6184 90 6940, Italy +39 02 02 95059 434-254-375, Netherlands +31 76 571 4440, Nordic/Baltic countries +358 9 329 100, Russia/CIS +7 (812) 703 42 15, Spain/Portugal +34 93 223 09 18, Switzerland +41 44 454 12 12, UK/Ireland +44 870 609 9203

Asia: China +86 21 6865 4588 or +86 10 8419 3588, India toll free 1800 22 8374, India +91 22 6716 2200, Japan +81 45 453 9220, Other Asian countries +852 2885 4613 **Countries not listed:** +49 6184 90 6940 or +33 2 2803 2180